

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/075706 A1

(51) International Patent Classification⁷: A45D 1/04

(21) International Application Number: PCT/KR03/00440

(22) International Filing Date: 7 March 2003 (07.03.2003)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
20-2002-0006868 8 March 2002 (08.03.2002) KR

(71) Applicant and

(72) Inventor: PARK, Kang-Su [KR/KR]; 104-305 Hyundai
1st Apt., Dowha-dong, Mapo-gu, Seoul 121-040 (KR).

(74) Agent: KIM, Won-Joon; 5th Floor, Shinwon Bldg.,
648-15 Yeoksam-dong, Kangnam-gu, Seoul 135-911
(KR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: CURLINGIRON MAKING HEAT SOURCE OF HEATED FLUID

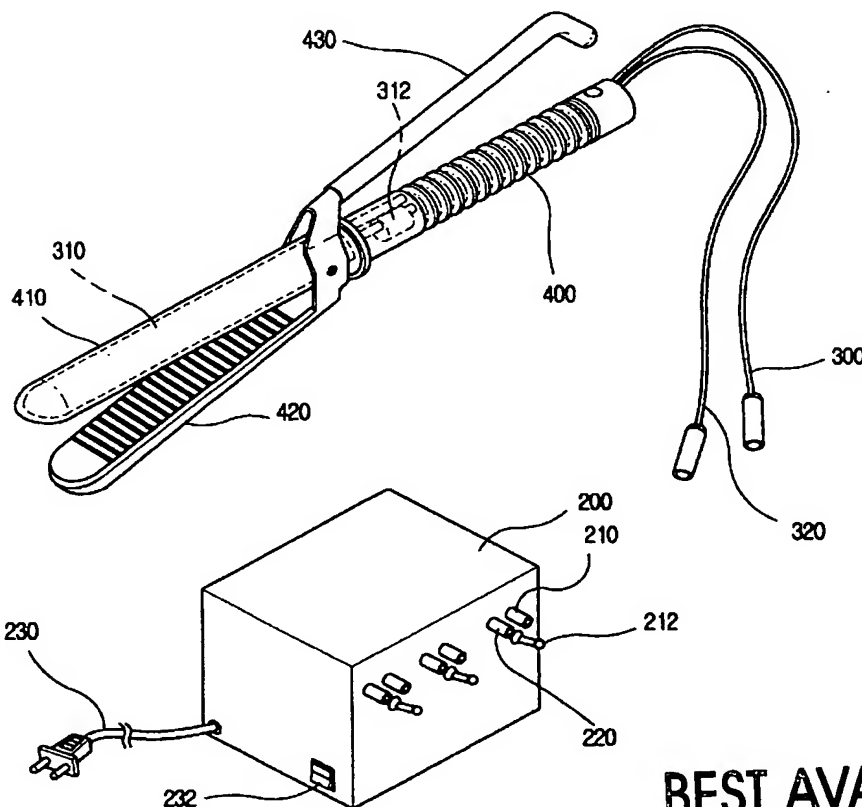

(57) Abstract: The object of this invention is to provide a curling iron using heated fluid as its heat source for heating hair. The curling iron of the present invention is comprised of a fluid heating unit which heats the fluid to produce steam (100) used as the heat source, a heating unit which transfers heat of the steam to hair, and thereby curls the hair, and curling tongs which support the heating unit so as to allow the heating unit to heat the hair while the curling tongs grasp the hair. Since the curling iron uses heated fluid as its heat source for heating hair, the curling iron maintains a constant temperature capable of accomplishing a desired curling effect and prevents an excessive increase in its temperature so as to prevent damage to the hair.

BEST AVAILABLE COPY



WO 03/075706 A1

WO 03/075706 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CURLING IRON MAKING HEAT SOURCE OF HEATED FLUID

Technical Field

5 The present invention relates, in general, to a curling iron using heated fluid as its heat source and, more particularly, to a curling iron using heated fluid as its heat source for heating hair, thus maintaining a constant temperature capable of accomplishing a desired curling effect and preventing an excessive increase in its temperature so as to prevent damage to the hair.

Background Art

10 As well known to those skilled in the art, conventional curling irons used for curling hair typically use electric coil heaters as heat sources thereof. Such an electric coil heater for the curling irons generates heat when it is operated by electricity, so that the heat is directly transferred from the heater to the hair during a curling process.

15 However, the conventional curling irons are problematic in that they cannot maintain constant temperatures since they are repeatedly turned on and turned off. The curling effect of the conventional curling irons is thus reduced. In addition, the temperature of the heater of the conventional curling iron is sometimes excessively increased during a curling process, and, in such a case, hair may be thermally damaged.

20 Disclosure of the Invention

Accordingly, the present invention has been made keeping in mind the above problems occurring in the prior art, and an object of the present invention is to provide a curling iron which uses heated fluid as its heat source for heating hair, thus maintaining a constant temperature capable of accomplishing a desired

curling effect and preventing an excessive increase in its temperature so as to prevent damage to the hair.

In order to accomplish the above object, the present invention provides a curling iron, comprising heated fluid used as a heat source of the iron, a fluid heating unit which heats the fluid used as the heat source, a heating unit which transfers heat of the heated fluid to hair, and thereby curls the hair, and curling tongs which support the heating unit so as to allow the heating unit to heat the hair while the curling tongs grasp the hair.

Brief Description of the Drawings

The above and other objects, features and other advantages of the present invention will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a perspective view of a curling iron, according to a preferred embodiment of the present invention; and

FIG.2 is a sectional view of the curling iron of FIG. 1.

Best Mode for Carrying Out the Invention

Reference should now be made to the drawings, in which the same reference numerals are used throughout the different drawings to designate the same or similar components.

FIG. 1 is a perspective view of a curling iron, according to a preferred embodiment of the present invention. FIG.2 is a sectional view of the curling iron of FIG. 1.

The curling iron of the present invention uses heated fluid as its heat source for heating a target material, that is, hair, and, in the preferred embodiment of the drawings, the heated fluid is steam 100. The steam 100 is typically increased in its temperature to 100 ~ 150°C, so that the steam 100 sufficiently

heats the hair, without thermally damaging the hair.

The curling iron of the present invention has a fluid heating unit which heats a fluid used as the heat source. In the preferred embodiment, the fluid heating unit is a steam generator 200 which is electrically operated to produce the steam 100. The steam generator 200 includes a plurality of steam outlet ports 210, a plurality of steam supply control switches 212, a plurality of condensed water inlet ports 220, and a plurality of check valves for preventing an undesired flow of the steam 100 into the condensed water inlet ports 220.

A power cord 230 and a power switch 232 are provided at the steam generator 200. The power cord 230 is used for supplying an electric current from an electric power source to the steam generator 200, while the power switch 232 is used for turning on or off the steam generator 200.

The curling iron of the present invention also has a heating unit which transfers heat of the steam 100 to hair, and thereby curls the hair. The heating unit includes a steam feeding tube 300 that is connected to one of the steam outlet ports 210 of the steam generator 200 so as to feed the steam 100 from the steam generator 200 to a steam storing/heat dissipating tube 310. The steam storing/heat dissipating tube 310 receives the steam 100 fed through the steam feeding tube 300, stores the steam 100 therein, and transfers heat of the steam 100 to the hair. A condensed water discharging unit 312 is connected to the steam storing/heat dissipating tube 310 so as to collect condensed water produced by a condensation of the steam 100 in the steam storing/heat dissipating tube 310, prior to returning the condensed water to the steam generator 200 through one of the condensed water inlet ports 220. A condensed water returning tube 320 is connected at both ends thereof to the condensed water discharging unit 312 and one of the condensed water inlet ports 220, and returns the condensed water from the condensed water discharging unit 312 to the steam generator 200 through the condensed water inlet port 220.

When the steam 100 is fed from the steam generator 200 to the steam storing/heat dissipating tube 310 through the steam feeding tube 300, the steam

100 heats the steam feeding tube 300, so that the heated tube 300 may burn a user when the user accidentally comes into contact with the heated tube 300. In an effort to overcome such a problem, it is preferred to finish the outer surface of the steam feeding tube 300 with a thermal insulating material.

5 The steam storing/heat dissipating tube 310 is preferably produced by using a metal having high thermal conductivity, and has a shape which allows the steam storing/heat dissipating tube 310 to come into effective contact with the hair during a curling process.

10 The curling iron of the present invention further includes curling tongs which support the heating unit so as to allow the heating unit to heat the hair while the curling tongs grasp the hair. The curling tongs are comprised of a handle 400, a main arm 410, a sub-arm 420, and a lever 430. The handle 400 is used as a grip of the curling tongs, with a part of the steam feeding tube 300 axially passing through the handle 400. The main arm 410 is connected to the
15 handle 400, and supports the steam storing/heat dissipating tube 310 therein. The sub-arm 420 is hinged to the main arm 410 such that the sub-arm 420 comes into contact with the steam storing/heat dissipating tube 310 of the main arm 410 to grasp the hair while the hair is heated by the steam heat, or moves away from the steam storing/heat dissipating tube 310 to release the hair after heating the
20 hair. The lever 430 is connected to the sub-arm 420 so as to allow the user to rotate the sub-arm 420 relative to the main arm 410 around the hinged joint of the two arms 410 and 420.

25 Since the steam generator 200 has the plurality of steam outlet ports 210 and the plurality of condensed water inlet ports 220, as described above, it is possible to connect a plurality of steam feeding tubes 300 and a plurality of condensed water returning tubes 320 to the steam generator 200, at the same time. Therefore, two or more curling tongs may be used with the steam generator 200 at the same time, so that two or more users may simultaneously curl the hair of several persons by use of a single steam generator 200. The curling irons of the
30 present invention are thus preferably used in beauty shops or other places in

which a plurality of hairdressers curl the hair of several persons at the same time.

The operational effect of the curling iron of the present invention will be described herein below, with reference to the drawings.

At first, the power switch 232 of the steam generator 200 is turned on to
5 allow the steam generator 200 to produce steam 100 therein. Thereafter, the steam feeding tube 300 is connected to a selected one of the steam outlet ports 210 of the steam generator 200, and the condensed water returning tube 320 is connected to a selected one of the condensed water inlet ports 220.

When a steam supply control switch 212 associated with the selected
10 steam outlet port 210 is turned on, the steam 100 flows from the steam generator 200 into the steam feeding tube 300 through the steam outlet port 210.

The steam 100 is, thereafter, fed through the steam feeding tube 300 into the steam storing/heat dissipating tube 310 that is supported by the main arm 410 of the curling tongs. At the steam storing/heat dissipating tube 310, the steam
15 100 heats the tube 310, so that the tube 310 radiates heat to the outside.

Therefore, when the user who grips the handle 400 manipulates the lever 430 to close the main and sub-arms 410 and 420, the two arms 410 and 420 grasp the hair while the steam storing/heat dissipating tube 310 heats the hair by use of the steam heat, thus curling the hair.

During the curling process, the temperature of the steam 100 inside the
20 steam storing/heat dissipating tube 310 is reduced, so that the steam 100 is condensed to produce condensed water. The condensed water is primarily collected in the condensed water discharging unit 312, and sequentially passes through the condensed water returning tube 320 and the condensed water inlet
25 port 220, thus being returned to the steam generator 200. The condensed water discharging unit 312 is designed to discharge only the condensed water from the steam storing/heat dissipating tube 310 while preventing leakage of the steam 100 from the steam storing/heat dissipating tube 310 into the condensed water returning tube 320.

Industrial Applicability

As described above, the present invention provides a curling iron using heated fluid as its heat source for heating hair. The curling iron of the present invention is comprised of a fluid heating unit which heats the fluid to produce steam used as the heat source, a heating unit which transfers heat of the steam to hair, and thereby curls the hair, and curling tongs which support the heating unit so as to allow the heating unit to heat the hair while the curling tongs grasp the hair. Since the curling iron uses heated fluid as its heat source for heating hair, the curling iron maintains a constant temperature capable of accomplishing a desired curling effect and prevents an excessive increase in its temperature so as to prevent damage to the hair.

Although the preferred embodiments of the present invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

Claims

1. A curling iron, comprising:

steam used as a heat source of the iron;

5 a steam generator electrically operated to produce the steam, and including a plurality of steam outlet ports, a plurality of steam supply control switches, a plurality of condensed water inlet ports, and a plurality of check valves for preventing a flow of the steam into the condensed water inlet ports;

a heating unit to transfer heat of the steam to a target material, the heating unit including:

10 a steam feeding tube connected to one of the steam outlet ports of the steam generator so as to feed the steam from the steam generator;

a steam storing/heat dissipating tube to receive the steam fed through the steam feeding tube, store the steam therein, and transfer heat of the steam to the target material;

15 a condensed water discharging unit connected to the steam storing/heat dissipating tube so as to discharge condensed water produced by a condensation of the steam in the steam storing/heat dissipating tube; and

20 a condensed water returning tube connected to the condensed water discharging unit so as to return the condensed water from the condensed water discharging unit to the steam generator through one of the condensed water inlet port; and

curling tongs to support the heating unit so as to allow the heating unit to heat the target material while the curling tongs grasp the target material, the

25 curling tongs including:

a handle used as a grip of the curling tongs, with a part of the steam feeding tube passing through the handle;

a main arm connected to the handle, and supporting the steam storing/heat dissipating tube;

a sub-arm hinged to the main arm such that the sub-arm comes into contact with or moves away from the steam storing/heat dissipating tube; and

a lever connected to the sub-arm so as to allow a user to rotate the sub-arm relative to the main arm.

5

FIG. 1


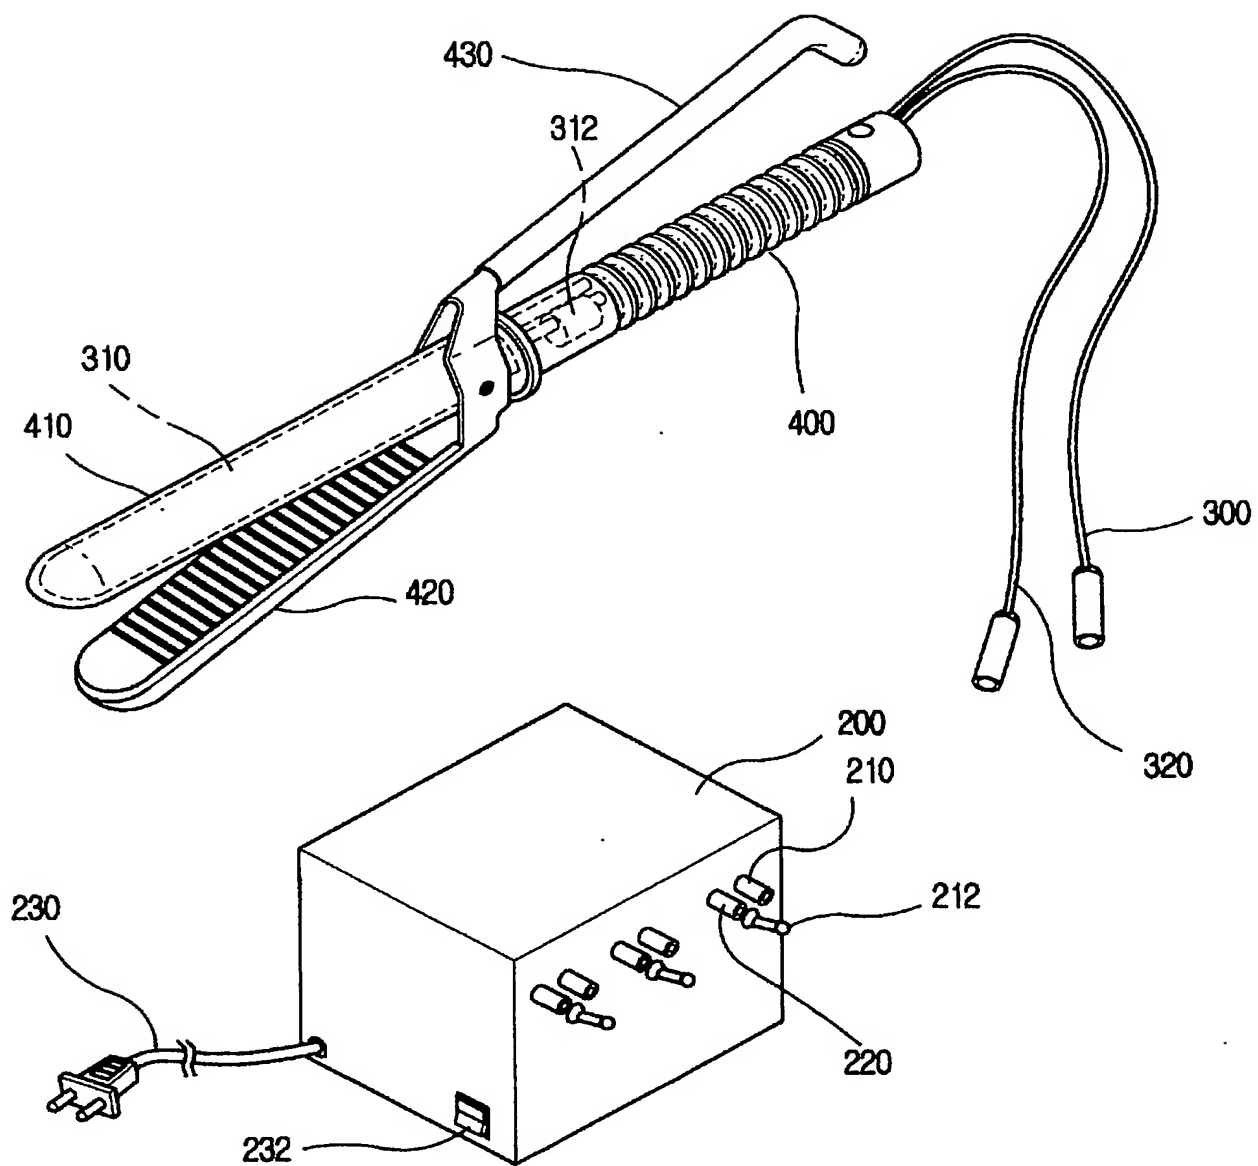


FIG. 2

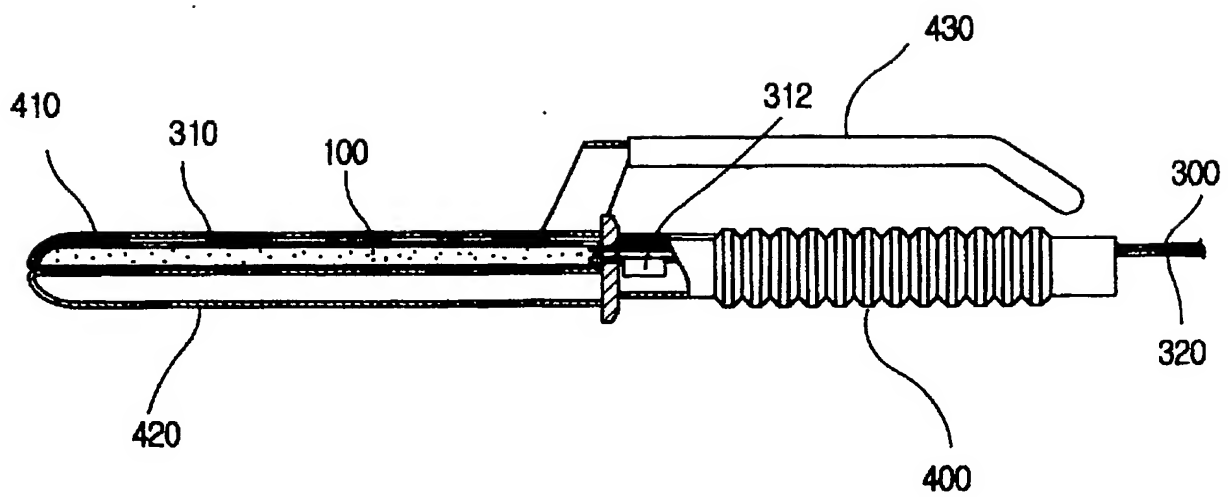

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR03/00440

A. CLASSIFICATION OF SUBJECT MATTER**IPC7 A45D 1/04**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 A45D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
JP, KR : IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3,934,597 A (DAZEY PRODUCTS CO) 27 JANUARY 1976 see the whole document	1
A	JP 54-164786 U (TOKYOSHIBAURA DENKI : KK) 19 NOVEMBER 1979 see the whole document	1
A	JP 50-154183 U (NICHIEI DENKI KIKAI SANGYO : KK) 20 DECEMBER 1975 see the whole document	1
A	KR 1999-22105 U (UISEONG CORPORATION) 25 JUNE 1999 see the whole document	1

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family


Date of the actual completion of the international search

25 JUNE 2003 (25.06.2003)

Date of mailing of the international search report

26 JUNE 2003 (26.06.2003)

Name and mailing address of the ISA/KR


 Korean Intellectual Property Office
 920 Dunsan-dong, Seo-gu, Daejeon 302-701,
 Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

PARK, Young Joon

Telephone No. 82-42-481-5618

